



# RUNWAY 10R-28L PAVING LIGHTING SIGNAGE

## Construction Waste Management

» 100%, or 249,000 tons, of construction waste was diverted from landfills including mainly soils, concrete, and asphalt.

## Balanced Earthwork

» Nearly 100%, or over 204,000 tons, of excavated earth was reused on-site.

## Recycled Content

» 66%, or \$8.4 million, of construction materials contained recycled materials including primarily asphalt treated permeable base (ATPB) and warm-mix asphalt (WMA) paving materials.

## Local and Regional Materials

» 100%, or \$17.3 million, of materials were obtained locally (within 250 miles of the site) including primarily asphalt paving materials.

## Innovation


» Warm-Mix Asphalt was used for shoulder pavement surfaces reducing emissions and fuel usage for the paving process.



O'HARE

DESIGNER: **ORD, LLC**  
CONTRACTOR: **Turner-Acura-Lindahl  
Triventure**

In recognition of your outstanding leadership in pursuit of sustainability within the aviation industry.

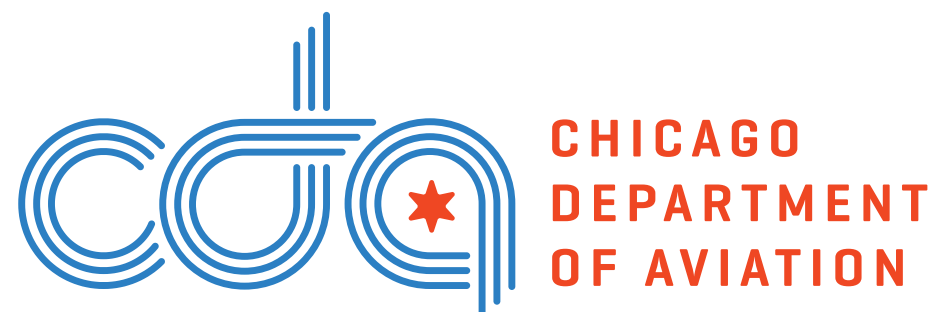

Jonathan Leach  
Chief Operating Officer

3/27/17

Date



**DESIGN & CONSTRUCTION**